UNITECH Inc



UNITECH
TERMINAL BLOCKS







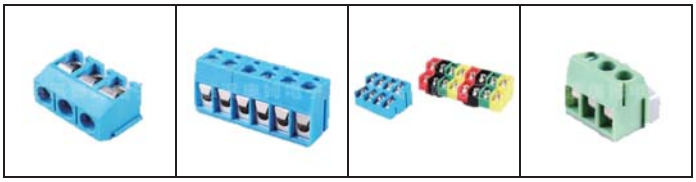
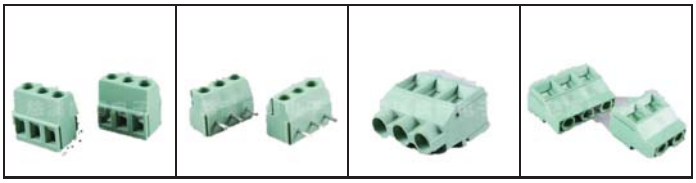
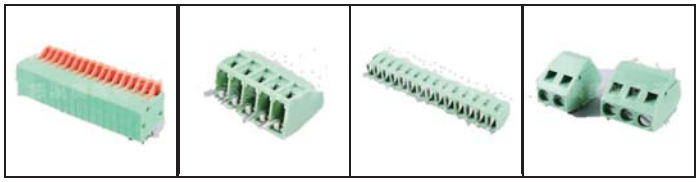
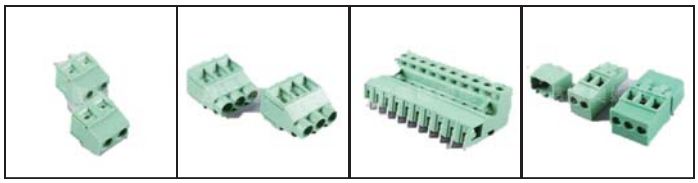
About Us

At **UNITECH Inc Bharat**, we believe that choosing the right partner is the first step toward lasting success. As a name synonymous with trust and innovation, we stand proudly as a leading supplier and manufacturer in India's industrial landscape — delivering not just products, but complete, dependable solutions.

We are proud to be one of the largest suppliers of:
WOER Heat Shrinkable Sleeves
WOER Expandable Sleeves
WOER Fibre Glass Sleeves
UNITECH Terminal Block
UNITECH Connectors
UNITECH Proximity Sensors
UNITECH Safety Guards
UNITECH Tinned Copper PVC Insulated Wires and Wire Harnesses
UNITECH Industrial Cables & Cords

In addition, **UNITECH Inc** is also a leading manufacturer of high-quality wires and cables, engineered to meet the rigorous demands of modern industries. Our commitment to excellence ensures that every product meets international standards of durability, safety, and performance.

With a strong nationwide presence and a customer-first approach, we serve diverse sectors with precision-engineered solutions — tailored to drive reliability, safety, and operational efficiency.
Welcome to a space where technology meets trust.
Welcome to **UNITECH Inc** — where industries find their edge.


UNITECH TERMINAL BLOCKS



AM15EDGK-3.5-3.81

Pitch：3.50/3.81mm
Poles：2P-24P
Rated voltage：300V
Rated current：8A
Wire range（AWG）：28-16
Torque：0.2Nm（1.7Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM15EDGKM-3.5-3.81

Pitch：3.50/3.81mm
Poles：2P-22P
Rated voltage：300V
Rated current：8A
Wire range（AWG）：28-16
Torque：0.2Nm（1.7Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM15EDGVM-3.5-3.81

Pitch：3.50/3.81mm
Poles：2P-22P
Rated voltage：300V
Rated current：8A
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM15EDGRM-3.5-3.81

Pitch：3.50/3.81mm
Poles：2P-22P
Rated voltage：300V
Rated current：8A
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM15EDGKA-3.5-3.81

Pitch：3.50/3.81mm
Poles：2P-24P
Rated voltage：300V
Rated current：8A
Wire range（AWG）：28-16
Torque：0.2Nm（1.7Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM15EDGKAM-3.5-3.81

Pitch：3.50/3.81mm
Poles：2P-22P
Rated voltage：300V Rated current：8A
Wire range（AWG）：28-16
Torque：0.2Nm（1.7Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM15EDGVH-3.5-3.81

Pitch：3.50/3.81mm
Poles：2*（2P-22P）
Rated voltage：300V
Rated current：8A
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM15EDGKAM-3.5-3.81

Pitch：3.50/3.81mm
Poles：2P-22P
Rated voltage：300V
Rated current：8A
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM15EDGKB-3.5-3.81

Pitch：3.50/3.81mm
Poles：2P-22P
Rated voltage：300V
Rated current：8A
Wire range（AWG）：28-16
Torque：0.2Nm（1.7Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM15EDGKBM-3.5-3.81

Pitch：3.50/3.81mm
Poles：2P-22P
Rated voltage：300V
Rated current：8A
Wire range（AWG）：28-16
Torque：0.2Nm（1.7Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM15EDGVHM-3.5-3.81

Pitch：3.50/3.81mm
Poles：2P-22P
Rated voltage：300V
Rated current：8A
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM15EDGRHM-3.5-3.81

Pitch：3.50/3.81mm
Poles：2*（2P-22P）
Rated voltage：300V
Rated current：8A
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM15EDGV-3.5-3.81

Pitch：3.50/3.81mm
Poles：2P-24P
Rated voltage：300V
Rated current：8A
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM15EDGR-3.5-3.81

Pitch：3.50/3.81mm
Poles：2P-24P
Rated voltage：300V
Rated current：8A
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM15CDGV-3.81

Pitch：3.50/3.81mm
Poles：2P-22P
Rated voltage：300V Rated current：10A
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM2EDGK-5.0-5.08

Pitch：5.00/5.08mm
Poles：2P-24P
Rated voltage：300V
Rated current：15A
Wire range（AWG）：28-12
Torque：0.4Nm（3.6Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min

UNITECH TERMINAL BLOCKS



AM2EDGKM-5.0-5.08

Pitch: 5.00/5.08mm
Poles: 2P-22P
Rated voltage: 300V
Rated current: 15A
Wire range (AWG) : 28-12
Torque: 0.4Nm (3.6Lbin)
Temp range -40℃~+105℃
Withstanding Voltage: AC1500V/1Min



AM2EDGK-7.5-7.62

Pitch: 7.50/7.62mm
Poles: 2P-24P
Rated voltage: 300V
Rated current: 15A
Wire range (AWG) : 28-12
Torque: 0.4Nm (3.6Lbin)
Temp range -40℃~+105℃
Withstanding Voltage: AC1500V/1Min



AM2EDGKB-7.5-7.62

Pitch: 7.50/7.62mm
Poles: 2P-24P
Rated voltage: 300V
Rated current: 15A
Wire range (AWG) : 28-12
Torque: 0.4Nm (3.6Lbin)
Temp range -40℃~+105℃
Withstanding Voltage: AC1500V/1Min



AM2EDGKAM-7.5-7.62

Pitch: 7.50/7.62mm
Poles: 2P-22P
Rated voltage: 300V
Rated current: 15A
Wire range (AWG) : 28-12
Torque: 0.4Nm (3.6Lbin)
Temp range -40℃~+105℃
Withstanding Voltage: AC1500V/1Min



AM2EDGKM-7.5-7.62

Pitch: 7.50/7.62mm
Poles: 2P-22P
Rated voltage: 300V
Rated current: 15A
Wire range (AWG) : 28-12
Torque: 0.4Nm (3.6Lbin)
Temp range -40℃~+105℃
Withstanding Voltage: AC1500V/1Min



AM2EDGKA-5.0-5.08

Pitch: 5.00/5.08mm
Poles: 2P-24P
Rated voltage: 300V
Rated current: 15A
Wire range (AWG) : 28-12
Torque: 0.4Nm (3.6Lbin)
Temp range -40℃~+105℃
Withstanding Voltage: AC1500V/1Min



AM2EDGKBM-7.5-7.62

Pitch: 7.50/7.62mm
Poles: 2P (2P-22P)
Rated voltage: 300V
Rated current: 15A
Wire range (AWG) : 28-12
Torque: 0.4Nm (3.6Lbin)
Temp range -40℃~+105℃
Withstanding Voltage: AC1500V/1Min



AM2EDGV-5.0-5.08

Pitch: 5.00/5.08mm
Poles: 2P-24P
Rated voltage: 300V
Rated current: 15A
Temp range -40℃~+105℃
Withstanding Voltage: AC1500V/1Min



AM2EDGKB-5.0-5.08

Pitch: 5.00/5.08mm
Poles: 2P-24P
Rated voltage: 300V
Rated current: 15A
Wire range (AWG) : 28-12
Torque: 0.4Nm (3.6Lbin)
Temp range -40℃~+105℃
Withstanding Voltage: AC1500V/1Min



AM2EDGKAM-5.0-5.08

Pitch: 5.00/5.08mm
Poles: 2P-22P
Rated voltage: 300V
Rated current: 15A
Wire range (AWG) : 28-12
Torque: 0.4Nm (3.6Lbin)
Temp range -40℃~+105℃
Withstanding Voltage: AC1500V/1Min



AM2EDGVC-5.0-5.08

Pitch: 5.00/5.08mm
Poles: 2P-24P
Rated voltage: 300V
Rated current: 15A
Temp range -40℃~+105℃
Withstanding Voltage: AC1500V/1Min



AM2EDGR-5.0-5.08

Pitch: 3.50/3.81mm
Poles: 2P-24P
Rated voltage: 300V
Rated current: 15A
Temp range -40℃~+105℃
Withstanding Voltage: AC1500V/1Min



AM2EDGKBM-5.0-5.08

Pitch: 5.00/5.08mm
Poles: 2P-22P
Rated voltage: 300V
Rated current: 15A
Wire range (AWG) : 28-12
Torque: 0.4Nm (3.6Lbin)
Temp range -40℃~+105℃
Withstanding Voltage: AC1500V/1Min



AM2EDGKA-7.5-7.62

Pitch: 7.50/7.62mm
Poles: 2P-24P
Rated voltage: 300V
Rated current: 15A
Wire range (AWG) : 28-12
Torque: 0.4Nm (3.6Lbin)
Temp range -40℃~+105℃
Withstanding Voltage: AC1500V/1Min



AM2EDGVM-5.0-5.08

Pitch: 5.00/5.08mm
Poles: 2P-24P
Rated voltage: 300V
Rated current: 15A
Temp range -40℃~+105℃
Withstanding Voltage: AC1500V/1Min



AM2EDGRM-5.0-5.08

Pitch: 5.00/5.08mm
Poles: 2P-24P
Rated voltage: 300V
Rated current: 15A
Temp range -40℃~+105℃
Withstanding Voltage: AC1500V/1Min

UNITECH TERMINAL BLOCKS



AM2EDGV-7.5-7.6

Pitch：7.50/7.62mm
Poles：2P-24P
Rated voltage：300V
Rated current：15A
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM2EDGVC-7.5-7.62

Pitch：7.50/7.62mm
Poles：2P-24P
Rated voltage：300V
Rated current：15A
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



HT508R

Pitch：5.08mm
Poles：2P-24P
Rated voltage：300V
Rated current：15A
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



HT396K

Pitch：3.96mm
Poles：2P-24P
Rated voltage：300V
Rated current：15A
Wire range（AWG）：24-14
Torque：0.4Nm（3.6Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM2EDGR-7.5-7.62

Pitch：7.50/7.62mm
Poles：2P-24P
Rated voltage：300V
Rated current：15A
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM2EDGRC-7.5-7.62

Pitch：7.50/7.62mm
Poles：2P-24P
Rated voltage：300V
Rated current：15A
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



HT396V

Pitch：3.96mm
Poles：2P-24P
Rated voltage：300V
Rated current：15A
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



HT396R

Pitch：3.96mm
Poles：2P-24P
Rated voltage：300V
Rated current：15A
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM2EDGVM-7.5-7.62

Pitch：7.50/7.62mm
Poles：2P-22P
Rated voltage：300V
Rated current：15A
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM2EDGRM-7.5-7.62

Pitch：7.50/7.62mm
Poles：2P-22P
Rated voltage：300V
Rated current：15A
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min

Unitech Screw terminal



AM300V

Pitch：5.00mm
Poles：2P-24P
Rated voltage：300V
Rated current：16A
Wire range（AWG）：22-14
Torque：0.5Nm（4.4Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM300R

Pitch：5.00mm
Poles：2P-24P
Rated voltage：300V
Rated current：16A
Wire range（AWG）：22-14
Torque：0.5Nm（4.4Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



HT508K

Pitch：5.08mm
Poles：2P-24P
Rated voltage：300V
Rated current：15A
Wire range（AWG）：22-14
Torque：0.4Nm（3.6Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



HT508V

Pitch：5.08mm
Poles：2P-24P
Rated voltage：300V
Rated current：15A
Wire range（AWG）：28-12
Withstanding Voltage：AC1500V/1Min



AM301V

Pitch：5.00mm
Poles：2P-24P
Rated voltage：300V
Rated current：16A
Wire range（AWG）：22-14
Torque：0.4Nm（3.6Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM332

Pitch：5.00mm
Poles：2P-24P
Rated voltage：300V
Rated current：16A
Wire range（AWG）：22-14
Torque：0.4Nm（3.6Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min

UNITECH SCREW TERMINAL BLOCKS



AM103

Pitch：5.00mm
Poles：2P-24P
Rated voltage：300V
Rated current：16A
Wire range（AWG）：24-14
Torque：0.4Nm（3.6Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM120

Pitch：2.54mm
Poles：2P-24P
Rated voltage：150V
Rated current：6A
Wire range（AWG）：26-18
Torque：0.15Nm（1.3Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM128V

Pitch：5.00/7.50mm
Poles：2P-24P
Rated voltage：300V
Rated current：16A
Wire range（AWG）：24-12
Torque：0.4Nm（3.6Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM128R

Pitch：5.00/7.50mm
Poles：2P-24P
Rated voltage：300V
Rated current：16A
Wire range（AWG）：24-12
Torque：0.4Nm（3.6Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM126V

Pitch：5.00mm
Poles：2P-24P
Rated voltage：300V
Rated current：16A
Wire range（AWG）：26-14
Torque：0.4Nm（3.6Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM126R

Pitch：5.00mm
Poles：2P-24P
Rated voltage：300V
Rated current：16A
Wire range（AWG）：26-14
Torque：0.4Nm（3.6Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM128H

Pitch：5.00/7.50mm
Poles：2P-24P
Rated voltage：300V
Rated current：16A
Wire range（AWG）：24-12
Torque：0.4Nm（3.6Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM128A

Pitch：5.00/7.50mm
Poles：2P-24P
Rated voltage：300V
Rated current：16A
Wire range（AWG）：24-12
Torque：0.4Nm（3.6Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM127V

Pitch：5.00/5.08mm
Poles：2P-22P
Rated voltage：300V
Rated current：16A
Wire range（AWG）：26-14
Torque：0.4Nm（3.6Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM127R

Pitch：5.00/5.08mm
Poles：2P-24P
Rated voltage：300V
Rated current：16A
Wire range（AWG）：26-14
Torque：0.4Nm（3.6Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM129V

Pitch：5.00/5.08mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：26-12
Torque：0.5Nm（4.4Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM129R

Pitch：5.00/5.08mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：26-12
Torque：0.5Nm（4.4Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM127H

Pitch：5.00/5.08mm
Poles：2P-24P
Rated voltage：300V
Rated current：16A
Wire range（AWG）：26-14
Torque：0.4Nm（3.6Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM127A

Pitch：5.00/5.08mm
Poles：2P-24P
Rated voltage：300V
Rated current：16A
Wire range（AWG）：26-14
Torque：0.4Nm（3.6Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM129-7.5 7.62

Pitch：7.50/7.62mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：26-12
Torque：0.5Nm（3.6Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM350.396V

Pitch：3.50/3.96mm
Poles：2P-24P
Rated voltage：300V
Rated current：7A
Wire range（AWG）：24-18
Torque：0.2Nm（3.6Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min

UNITECH SCREW TERMINAL BLOCKS



AM350.396R

Pitch：3.50/3.96mm
Poles：2P-24P
Rated voltage：300V
Rated current：7A
Wire range（AWG）：24-18
Torque：0.2Nm（1.7Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM381V

Pitch：3.50/3.81mm
Poles：2P-24P
Rated voltage：150V
Rated current：10A
Wire range（AWG）：26-16
Torque：0.2Nm（1.7Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM381H

Pitch：3.50/3.81mm
Poles：2P-24P
Rated voltage：300V
Rated current：10A
Wire range（AWG）：26-16
Torque：0.2Nm（1.7Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM381A

Pitch：5.00/5.08mm
Poles：2P-24P
Rated voltage：300V
Rated current：10A
Wire range（AWG）：26-16
Torque：0.2Nm（1.7Lbin）
Temp range a℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM166

Pitch：5.0mm
Poles：2P-24P
Rated voltage：300V
Rated current：15A
Wire range（AWG）：22-14
Torque：0.5Nm（4.4Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM635

Pitch：6.35mm
Poles：2P-24P
Rated voltage：300V
Rated current：30A
Wire range（AWG）：26-10
Torque：0.5Nm（4.4Lbin）
Temp range a℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM636

Pitch：7.62mm
Poles：2P-24P
Rated voltage：300V
Rated current：30A
Wire range（AWG）：26-10
Torque：0.5Nm（4.4Lbin）
Temp range a℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM950

Pitch：9.50mm
Poles：2P-24P
Rated voltage：300V
Rated current：30A
Wire range（AWG）：26-10
Torque：0.5Nm（4.4Lbin）
Temp range a℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM135T

Pitch：10.16mm
Poles：2P-24P
Rated voltage：300V
Rated current：30A
Wire range（AWG）：24-12
Torque：2Nm（17.54Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM137T

Pitch：10.16mm
Poles：2P-6P
Rated voltage：300V
Rated current：14A
Wire range（AWG）：28-12
Torque：2Nm（17.54Lbin）
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min

Unitech Screw free terminal



AM141V

Pitch：2.54mm
Poles：2P-24P
Rated voltage：150V
Rated current：2A
Wire range（AWG）：26-20
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM141R

Pitch：2.54mm
Poles：2P-24P
Rated voltage：150V
Rated current：2A
Wire range（AWG）：26-20
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM142V

Pitch：5.08/7.62mm
Poles：2P-24P
Rated voltage：300V
Rated current：10A
Wire range（AWG）：26-12
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM142R

Pitch：5.08/7.62mm
Poles：2P-24P
Rated voltage：300V
Rated current：10A
Wire range（AWG）：26-12
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM250-2.5

Pitch：2.50mm
Poles：2P-24P
Rated voltage：300V
Rated current：7A
Wire range（AWG）：22-18
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM250-3.5

Pitch：3.50mm
Poles：2P-24P
Rated voltage：300V
Rated current：7A
Wire range（AWG）：22-18
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min

UNITECH SCREW FREE TERMINAL



AM144

Pitch：5.0mm
Poles：2P-24P
Rated voltage：300V
Rated current：10A
Wire range（AWG）：20-18
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM144A

Pitch：5.0mm
Poles：2P-24P
Rated voltage：300V
Rated current：5A
Wire range（AWG）：22-14
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM243

Pitch：5.0mm
Poles：2P-24P
Rated voltage：300V
Rated current：15A
Wire range（AWG）：28-12
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM145

Pitch：5.0mm
Poles：2P-24P
Rated voltage：300V
Rated current：15A
Wire range（AWG）：28-12
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min

Unitech Palisade terminal



AM7620

Pitch：7.62mm
Poles：2P-24P
Rated voltage：300V
Rated current：10A
Wire range（AWG）：22-16
Torque：5.10kgf-cm/0.5Nm/4.43Lbin
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM8500

Pitch：8.5mm
Poles：2P-24P
Rated voltage：300V
Rated current：10A
Wire range（AWG）：22-16
Torque：5.10kgf-cm/0.5Nm/4.43Lbin
Temp range a℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM8500H

Pitch：8.5mm
Poles：2*（2P-24P）
Rated voltage：300V
Rated current：10A
Wire range（AWG）：22-16
Torque：5.10kgf-cm/0.5Nm/4.43Lbin
Temp range a℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM25C

Pitch：7.62mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range a℃~+105℃
Withstanding Voltage：AC1500V/1Min

UNITECH PALISADE TERMINAL



AM25S

Pitch：7.62mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM25H

Pitch：7.62mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM25R

Pitch：7.62mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM25M

Pitch：7.62mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM25MR

Pitch：7.62mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM35C

Pitch：8.25mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM35S

Pitch：8.25mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM35H

Pitch：8.25mm
Poles：2P-24P
Rated voltage：300V Rated current：20A
Wire range（AWG）：22-14 Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min

UNITECH PALISADE TERMINAL



AM35R

Pitch：8.25mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM35M

Pitch：8.25mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM55C

Pitch：10.0mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM55S

Pitch：10.0mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM35MR

Pitch：8.25mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM45C

Pitch：9.50mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM55H

Pitch：10.0mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM55R

Pitch：10.0mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM45S

Pitch：9.50mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM45H

Pitch：9.50mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM55M

Pitch：10.0mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM55MR

Pitch：10.0mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM45R

Pitch：9.50mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM45MR

Pitch：7.62mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM65C

Pitch：11.0mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM65S

Pitch：11.0mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Mi

UNITECH PALISADE TERMINAL



AM65H

Pitch：11.0mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM65R

Pitch：11.0mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM38C

Pitch：8.25mm
Poles：2P-24P
Rated voltage：300V
Rated current：15A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM38S

Pitch：8.25mm
Poles：2P-24P
Rated voltage：300V
Rated current：15A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM65M

Pitch：11.0mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM65MR

Pitch：11.0mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM38H

Pitch：10.0mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM38R

Pitch：10.0mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM28C

Pitch：7.62mm
Poles：2P-24P
Rated voltage：300V
Rated current：10A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM28S

Pitch：7.62mm
Poles：2P-24P
Rated voltage：300V
Rated current：10A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM48C

Pitch：9.50mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM48S

Pitch：9.50mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM28H

Pitch：7.62mm
Poles：2P-24P
Rated voltage：300V
Rated current：10A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM28R

Pitch：7.62mm
Poles：2P-24P
Rated voltage：300V
Rated current：10A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM48H

Pitch：9.50mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM48R

Pitch：9.50mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min

UNITECH PALISADE TERMINAL



AM58C

Pitch：10.0mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM58S

Pitch：10.0mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM825

Pitch：8.25mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM9500S

Pitch：9.50mm
Poles：2P-24P
Rated voltage：300V
Rated current：15A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM58H

Pitch：10.0mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM58R

Pitch：10.0mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM9500C

Pitch：9.50mm
Poles：2P-24P
Rated voltage：300V
Rated current：20A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM78C

Pitch：13.0mm
Poles：2P-24P
Rated voltage：600V
Rated current：40A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM78S

Pitch：13.0mm
Poles：2P-24P
Rated voltage：600V
Rated current：40A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM78H

Pitch：13.0mm
Poles：2P-24P
Rated voltage：600V
Rated current：40A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min



AM78R

Pitch：13.0mm
Poles：2P-24P
Rated voltage：600V
Rated current：40A
Wire range（AWG）：22-14
Torque：8kg.cm
Temp range -40℃~+105℃
Withstanding Voltage：AC1500V/1Min

UNITECH Inc

Continuous innovation,
Temper forward



UNITECH Inc

Reg Off. : Manhar Building, 3rd Floor, 177 Lohar Chawl, Mumbai 400 002.
Tel.: 2206 1671 Contact. : +91 9833948881 / +91 9833412376
Email: info@unitechinc.in / sales1@unitechinc.in
Website: www.unitechinc.in